

Mecalac

MCL
SERIES



MCL
SERIES **Mecalac**

MCL SERIES



MCL2



MCL4

MCL4+ Short Boom



MCL6

MCL6+ *Short Boom*




MCL8



VERSATILITY

- A** Powerful and reliable turbo diesel engine with up to 36 kW which complies with Stage V exhaust emission standards by integrating a particulate filter
- B** Hydrostatic 4-wheel drive transmission with wheel motors (MCL2) or gearbox and transmission shaft (MCL4-MCL6-MCL8)
- C** Articulated and oscillating chassis ensures excellent maneuverability and off-road capability
- D** Working hydraulic system with up to 30 lpm (MCL2-MCL4) or up to 60 lpm (MCL6-MCL8) for best attachment performance support
- E** Two different booms for individual customer needs
 - Long boom with increased dumping height
 - Short boom with increased tipping load
-  Optional MyMecalac telematics to maximise the use of your machines thanks to optimized and accessible machine data, reduced downtimes, and better fleet management

- F** All machines come with a large and comfortable canopy version, a cabin version is as well available
- G** The optional air conditioning is available for MCL6-MCL8 to provide the best thermal comfort
- H** Maximum travelling comfort thanks to articulation joint
- I** Canopy and cabin with flexible four point mountings to reduce vibration and noise for maximum driver comfort and minimum noise level
- J** Extensive range of quick couplers for different attachment systems

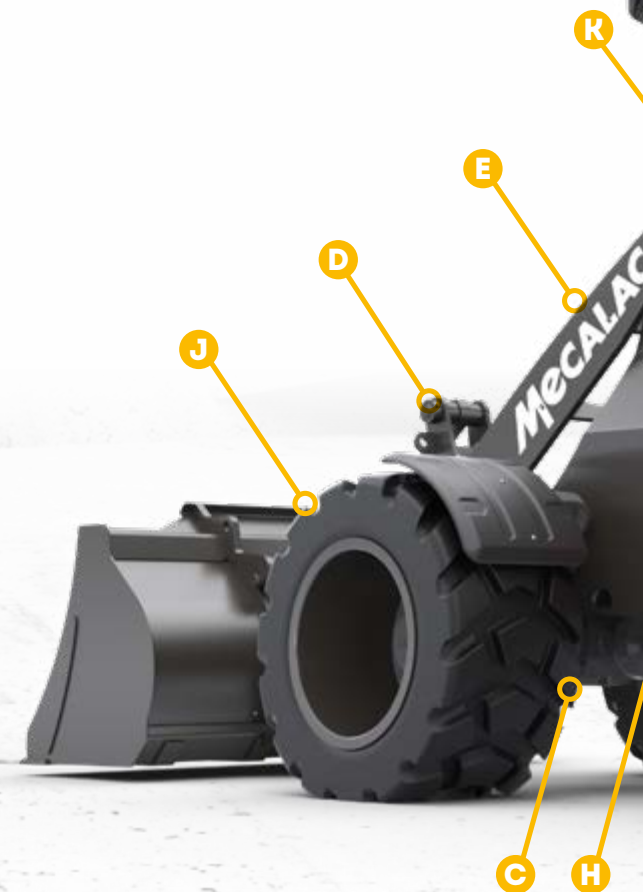



EASE OF USE

PERFORMANCE

- K** Easy and safe access from both sides thanks to high visibility and self-cleaning steps and handrails
- L** Cast iron rear counter-weight protection
- M** Low and straight step to enter and leave the machine comfortably and safely
- N** Easy access to all relevant parts for the daily maintenance
- O** 1 LED working light standard on the boom (or optional 2 LED lights). Up to 2 front and 2 rear optional LED working lights on canopy / cabin





MCL SERIES

STANDARD / OPTIONNAL FEATURES

MCL SERIES

STANDARD / OPTIONAL FEATURES

SPEED	MCL2	MCL4	MCL4+	MCL6	MCL6+	MCL8
12 km/h (7 mph) version	•					
20 km/h (12 mph) version		•	•	•	•	•
20 km/h (12 mph) with differential lock 100%				o	o	o
30 km/h (19 mph) version				o	o	o
30 km/h (19 mph) with differential lock 100%				o	o	o
COLOR	MCL2	MCL4	MCL4+	MCL6	MCL6+	MCL8
Mecalac Color	•	•	•	•	•	•
Special Color	o	o	o	o	o	o
CANOPY / CABIN	MCL2	MCL4	MCL4+	MCL6	MCL6+	MCL8
Canopy	•	•	•	•	•	•
Cabin with heating	o	o	o	o	o	o
Cabin with heating and air conditioning				o	o	o
ROPS side gates	o	o	o	o	o	o
Rearview mirror (interior mirror)	o	o	o	o	o	o
SEAT	MCL2	MCL4	MCL4+	MCL6	MCL6+	MCL8
Standard seat - Mechanical suspension	•	•	•	•	•	•
Heated pneumatic seat	o	o	o	o	o	o
RADIO	MCL2	MCL4	MCL4+	MCL6	MCL6+	MCL8
Radio predisposition (cabin only)	o	o	o	o	o	o
Radio (cabin only)	o	o	o	o	o	o
BOOM	MCL2	MCL4	MCL4+	MCL6	MCL6+	MCL8
Long boom	•	•	•	•	•	•
Short Boom		o	o	o	o	o
STANDARD TYRES	MCL2	MCL4	MCL4+	MCL6	MCL6+	MCL8
7 x 12.00 - Agriculture profile (≈1040 mm (3'5") width)	•					
10.0/75 - 17 Agri Profile (≈1100 mm (3'7") width)		•	•	•	•	•
11.5/80 - 15.3 - Agriculture profile (≈1236 mm (4') width)						•
FENDERS	MCL2	MCL4	MCL4+	MCL6	MCL6+	MCL8
Fenders	•	•	•	•	•	•
Wide fenders	o	o	o	o	o	o
Extra wide fenders				o	o	o
QUICK ATTACH	MCL2	MCL4	MCL4+	MCL6	MCL6+	MCL8
Skid-Steer mechanical QA	•	•	•			
4 Points hydraulic QA	o	o	o	•	•	•
Euro-Style QA	o	o	o	o	o	o
Skid-steer hydraulic QA	o	o	o	o	o	o
AUXILIARY LINES	MCL2	MCL4	MCL4+	MCL6	MCL6+	MCL8
On / Off hydraulic for 1 st auxiliary hydraulic line	•	•	•			
Proportional hydraulic for 1 st auxiliary hydraulic line	o	o	o	•	•	•
2 nd auxiliary hydraulic line (T) - Hydraulic flat face fittings for 2 nd auxiliary hydraulic line	o	o	o	o	o	o
Rear auxiliary hydraulic line (T) in Flat face	o	o	o	o	o	o

WORKING LIGHTS	MCL2	MCL4	MCL4+	MCL6	MCL6+	MCL8
1 working light (LED) on boom	•	•	•	•	•	•
2 working lights (LED) on boom	o	o	o	o	o	o
2 front working lights (LED) on canopy / cabin	o	o	o	o	o	o
2 rear working lights (LED) on canopy / cabin	o	o	o	o	o	o
BEACON	MCL2	MCL4	MCL4+	MCL6	MCL6+	MCL8
Beacon light (LED)	o	o	o	o	o	o
ELECTRICAL PLUGS	MCL2	MCL4	MCL4+	MCL6	MCL6+	MCL8
3-pole front electric plug for power supply 12V/15A	o	o	o	o	o	o
7-pole front electric plug for attachment lights	o	o	o	o	o	o
7-pole rear electric plug	o	o	o	o	o	o
Harness for trailer lights + rear power	o	o	o	o	o	o
Harness for rear power 12V/15A	o	o	o	o	o	o
ROAD LIGHTS	MCL2	MCL4	MCL4+	MCL6	MCL6+	MCL8
Road lights	o	o	o	o	o	o
Road lights with homologation Germany 20 km/h (12 mph)	o	o	o	o	o	o
Road lights with homologation Germany 30 km/h (19 mph)				o	o	o
Road lights with homologation Italy	o	o	o	o	o	o
TELEMATICS	MCL2	MCL4	MCL4+	MCL6	MCL6+	MCL8
Telematics	o	o	o	o	o	o
COMFORT OPTIONS	MCL2	MCL4	MCL4+	MCL6	MCL6+	MCL8
Hand throttle (M-Drive)	o	o	o	•	•	•
Travel speed detent				o	o	o
Detent button for auxiliary hydraulic line	o	o	o	•	•	•
Boom float	•	•	•	•	•	•
Boom and bucket float position	o	o	o	o	o	o
Lockable fuel tank cap	•	•	•	•	•	•
Speed limit (Speed-control)	o	o	o	•	•	•
SAFETY OPTIONS	MCL2	MCL4	MCL4+	MCL6	MCL6+	MCL8
Safety valves w.o. ride control	o	o	o	o	o	o
Ride control w.o. safety valves	o	o	o	o	o	o
Safety valves & ride control	o	o	o	o	o	o
Drawbar hitch	o	o	o	o	o	o
Backup alarm	o	o	o	o	o	o
Road safety kit	o	o	o	o	o	o
HYDRAULIC OIL	MCL2	MCL4	MCL4+	MCL6	MCL6+	MCL8
Standard oil VG 46	•	•	•	•	•	•
VG 46 synthetic - Panolin	o	o	o	o	o	o
Standard oil VG 68	o	o	o	o	o	o
VG 68 synthetic - Panolin	o	o	o	o	o	o
Standard oil VG 32	o	o	o	o	o	o

• Standard o Optional

MCL SERIES

TECHNICAL DATA

ENGINE						
Low-noise, water-cooled Perkins						
MCL2 / MCL4 / MCL4+ / MCL6 / MCL6+ / MCL8						
EU Stage V / U.S. EPA Tier 4 Final - Depending on your local legislation						
	MCL2	MCL4	MCL4+	MCL6	MCL6+	MCL8
Engine brand	Perkins					
Type	403J-11	403J-17	403J-17	403J-E17T	403J-E17T	403J-E17T
Number of cylinders / Capacity of cylinders	3 (Ø77x81)	3 (Ø84x100)	3 (Ø84x100)	3 (Ø84x100)	3 (Ø84x100)	3 (Ø84x100)
I.C. Engine power rating / Power (kW)	-	-	-	-	-	-
Engine cooling system	Liquid					
Net power at acc. to ISO 14396	2800 rpm 18.4 kW / 25 hp	2800 rpm 18.4 kW / 25 hp	2800 rpm 18.4 kW / 25 hp	2800 rpm 36 kW / 49 hp	2800 rpm 36 kW / 49 hp	2800 rpm 36 kW / 49 hp
Max. torque at acc. to ISO 14396	2100 rpm 66.8 Nm	1800 rpm 85 Nm	1800 rpm 85 Nm	1600 rpm 166 Nm	1600 rpm 166 Nm	1600 rpm 166 Nm
PERFORMANCE DATA						
	MCL2	MCL4	MCL4+	MCL6	MCL6+	MCL8
Boom type	Std boom	Std boom	Short boom	Std boom	Short boom	Std boom
Transport weight (canopy)	1740kg (3836 lb)	2400 kg (5291 lb)	2340 kg (5159 lb)	2450 kg (5401 lb)	2390 kg (5269 lb)	2850 kg (6283 lb)
Bucket capacity	0.36 - 0.49	0.39 - 0.49		0.39 - 0.52		0.42 - 0.52
Oscillation angle	±10°	±10°		±10°		±10°
Articulation angle	±45°	±45°		±45°		±40
Lifting force at ground position	1242 daN*	2025 daN*	2026 daN*	2025 daN*	2026 daN*	2517 daN*
Breakout force	1422 daN*	2015 daN*	2015 daN*	2015 daN*	2015 daN*	2501 daN*
Thrust force	1141 daN (2565 lbf)	1955 daN (4395 lbf)		1955 daN (4395 lbf)		2140 daN (4811 lbf)
Tipping load:						
- Standard bucket, straight	1015 kg (2238 lb)	1650 kg (3638 lb)	1885 kg (4156 lb)	1675 kg (3693 lb)	1910 kg (4211 lb)	1880 kg (4145 lb)
- Standard bucket, articulated	865 kg (1907 lb)	1450 kg (3197 lb)	1655 kg (3649 lb)	1470 kg (3241 lb)	1680 kg (3704 lb)	1650 kg (3638 lb)
Tipping load:						
- Forks, straight	740 kg (1631 lb)	1250 kg (2756 lb)	1390 kg (3064 lb)	1265 kg (2789 lb)	1410 kg (3108 lb)	1470 kg (3241 lb)
- Forks, articulated	630 kg (1389 lb)	1095 kg (2414 lb)	1220 kg (2690 lb)	1110 kg (2447 lb)	1235 kg (2723 lb)	1295 kg (2855 lb)

* To be confirmed

HYDRAULICS						
	MCL2	MCL4	MCL4+	MCL6	MCL6+	MCL8
Hydraulic pump type	Gear	Gear	Gear	Gear	Gear	Gear
Hydraulic flow - Pressure	207 bar (3,000 psi)	207 bar (3,000 psi)	207 bar (3,000 psi)	207 bar (3,000 psi)	207 bar (3,000 psi)	207 bar (3,000 psi)
Hydraulic flow	30 l/min (7.9 gpm)	30 l/min (7.9 gpm)	30 l/min (7.9 gpm)	60 l/min (15.9 gpm)	60 l/min (15.9 gpm)	60 l/min (15.9 gpm)
TANK CAPACITIES						
	MCL2	MCL4	MCL4+	MCL6	MCL6+	MCL8
Hydraulic oil	24 l (6.3 gal)	24 l (6.3 gal)	24 l (6.3 gal)	50 l (13.2 gal)	50 l (13.2 gal)	50 l (13.2 gal)
Fuel tank	30 l (7.9 gal)	50 l (13.2 gal)	50 l (13.2 gal)	50 l (13.2 gal)	50 l (13.2 gal)	65 l (17.2 gal)

MCL SERIES

TECHNICAL DATA


DRIVE	MCL2	MCL4	MCL4+	MCL6	MCL6+	MCL8
Transmission type	Hydrostatic with wheel motor	Hydrostatic with axles	Hydrostatic with axles	Hydrostatic with axles	Hydrostatic with axles	Hydrostatic with axles
Number of gears (forward / reverse)	1	2	2	2	2	2
Differential lock	-	100% in option	100% in option	100% in option	100% in option	100% in option
Travel speed: Max. travel speed*	0-12 km/h (0-7 mph)	0-20 km/h (0-12 mph)	0-20 km/h (0-12 mph)	0-20 km/h (0-12 mph)	0-20 km/h (0-12 mph)	0-20 km/h (0-12 mph)
Oscillation: max. oscillation angle	+/-11°	+/-11°	+/-11°	+/-11°	+/-11°	+/-11°

*May vary according to applicable regulations

BRAKES	MCL2	MCL4	MCL4+	MCL6	MCL6+	MCL8
1. Inch brake	Hydrostatic inching brake, acting on all 4 wheels	Hydrostatic inching brake, acting on all 4 wheels	Hydrostatic inching brake, acting on all 4 wheels	Hydrostatic inching brake, acting on all 4 wheels	Hydrostatic inching brake, acting on all 4 wheels	Hydrostatic inching brake, acting on all 4 wheels
2. Working brake	-	Hydraulically operated disc brake at the front axle, acting on all 4 wheels	Hydraulically operated disc brake at the front axle, acting on all 4 wheels	Hydraulically operated disc brake at the front axle, acting on all 4 wheels	Hydraulically operated disc brake at the front axle, acting on all 4 wheels	Hydraulically operated disc brake at the front axle, acting on all 4 wheels
3. Parking brake	Electrically activated parking brake, acting on 2 rear wheels, with deactivation of the drive or switch	Mechanically activated parking brake, acting on all 4 wheels, with deactivation of the drive	Mechanically activated parking brake, acting on all 4 wheels, with deactivation of the drive	Mechanically activated parking brake, acting on all 4 wheels, with deactivation of the drive	Mechanically activated parking brake, acting on all 4 wheels, with deactivation of the drive	Mechanically activated parking brake, acting on all 4 wheels, with deactivation of the drive

MCL SERIES



TECHNICAL DATA

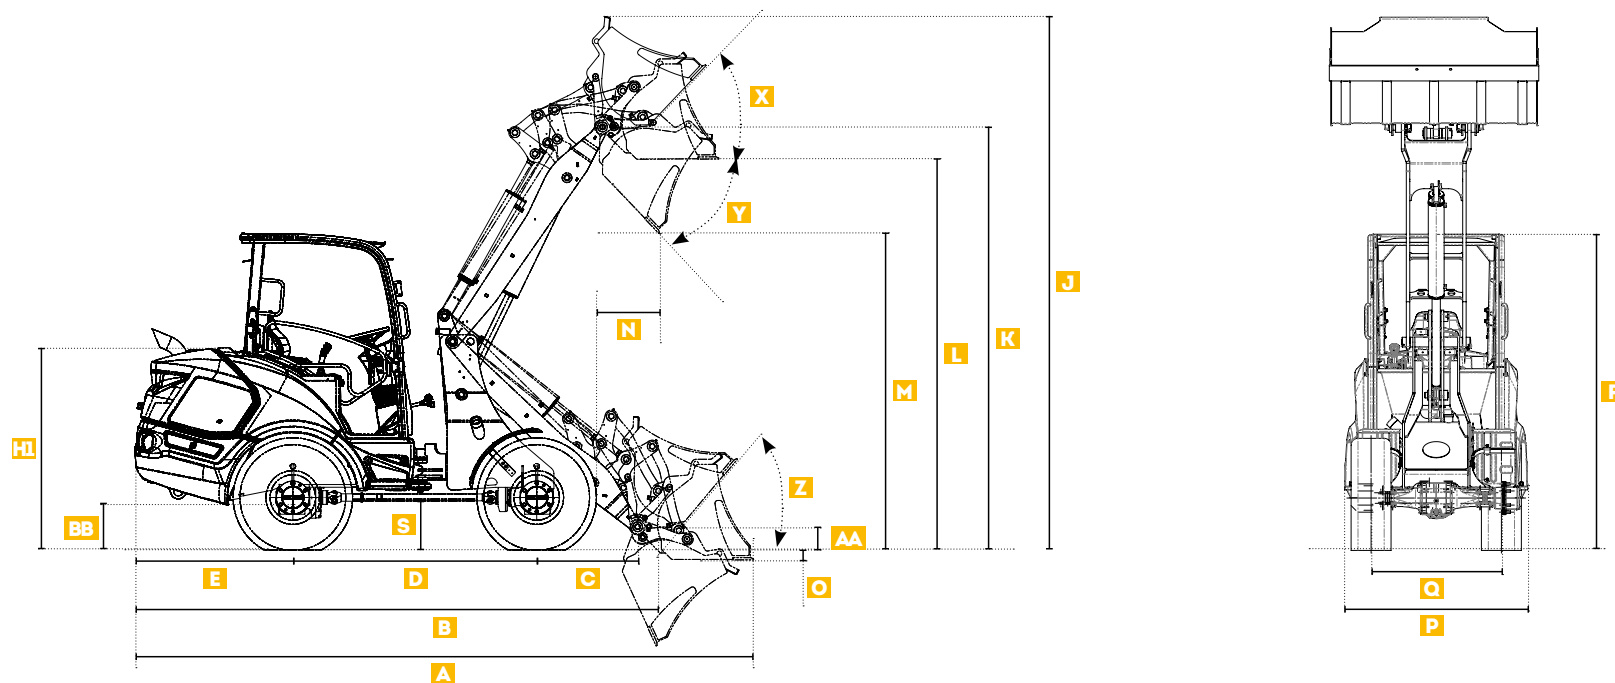

	MCL2	MCL4	MCL4+	MCL6	MCL6+	MCL8
	STD. 0.20 m ³ (0.26 yd ³)	STD. 0.30 m ³ (0.39 yd ³)		STD. 0.40 m ³ (0.52 yd ³)		STD. 0.50 m ³ (0.65 yd ³)
		Standard boom	Short boom	Standard boom	Short boom	
A Overall Length /Bucket Level	3627 mm (11'10")	4154 mm (13'7")	4104 mm (13'5")	4279 mm (14'0")	4230 mm (13'10")	4490 mm (14'8")
B Overall Length - Less Bucket	2928 mm (9'7")	3458 mm (11'4")	3406 mm (11'2")	3583 mm (11'9")	3531 mm (11'7")	3792 mm (12'5")
C Front Wheel Center to Hinge Pin - Arm Down	563 mm (1'10")	669 mm (2'2")	617 mm (2'0")	669 mm (2'2")	617 mm (2'0")	733 mm (2'4")
D Wheel Base	1419 mm (4'7")	1650 mm (5'4")	1650 mm (5'4")	1650 mm (5'4")	1650 mm (5'4")	1770 mm (5'9")
E Rear Overhang	801 mm (2'7")	995 mm (3'3")	995 mm (3'3")	1120 mm (3'8")	1120 mm (3'8")	1146 mm (3'9")
F Overall Height @ ROPS	2140 mm (7'0")	2258 mm (7'4")	2258 mm (7'4")	2258 mm (7'4")	2258 mm (7'4")	2290 mm (7'6")
H Height to Top of Hood	1254 mm (4'1")	1405 mm (4'3")	1405 mm (4'3")	1405 mm (4'3")	1405 mm (4'3")	1469 mm (4'9")
J Overall Operating Height - Fully Raised, Bucket Rolled Back	3535 mm (11'7")	3636 mm (11'11")	3253 mm (10'8")	3636 mm (11'11")	3253 mm (10'8")	3870 mm (12'8")
K Height to Hinge Pin - Fully Raised	2736 mm (8'11")	2836 mm (9'3")	2435 mm (7'11")	2836 mm (9'3")	2435 mm (7'11")	3070 mm (10'0")
L Ground Plane to Bucket Edge Height	2515 mm (8'3")	2595 mm (8'6")	2208 mm (7'2")	2595 mm (8'6")	2208 mm (7'2")	2837 mm (9'3")
M Dump Height - Fully Raised	2008 mm (6'7")	2066 mm (6'9")	1829 mm (6'0")	2066 mm (6'9")	1829 mm (6'0")	2301 mm (7'6")
N Dump Reach - Fully Raised	475 mm (1'6.7")	485 mm (1'7")	524 mm (1'8")	485 mm (1'7")	524 mm (1'8")	458 mm (1'6")
O Digging Position (+ Above Ground / - Below Ground)	45 mm (0'1.7")	139 mm (0'5.4")	116 mm (0'4.5")	139 mm (0'5.4")	116 mm (0'4.5")	72 mm (0'2.8")
P Overall Width - Less Bucket	1040 mm (3'4")	1100 mm (3'7")	1100 mm (3'7")	1100 mm (3'7")	1100 mm (3'7")	1330 mm (4'4")
Q Track or Tread Width (Wheel Center)	848 mm (2'9")	836 mm (2'89")	836 mm (2'89")	836 mm (2'89")	836 mm (2'89")	946 mm (3'1")

MCL SERIES

TECHNICAL DATA

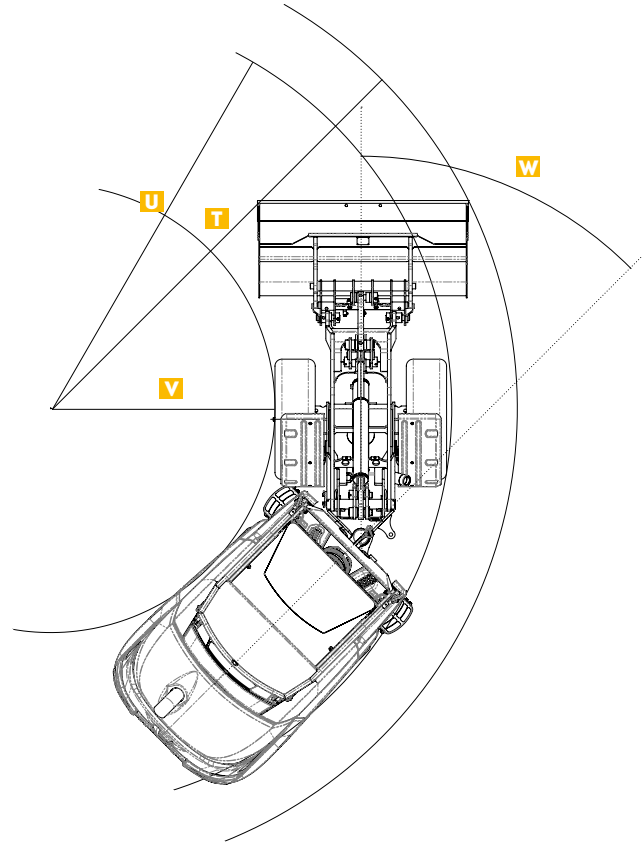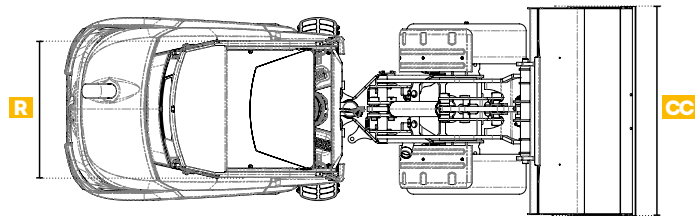

OVERALL WIDTH WITH DIFFERENT TIRE OFFERS

MCL2		
7 x 12.00 - AG		1040 mm (3'4")
27 x 8.5 - 15 - SK		1051 mm (3'5")
27 x 10.5 - 15 - EM		1113 mm (3'65")
26 x 12 - 12 - AG		1225 mm (4'0")
26 x 12 - 12 - EM		1227 mm (4'0")

MCL4 / MCL4+		
10/75 - 15.3		1100 mm (3'6")
10 x 16.5		1100 mm (3'6")
31 x 15.5 - 15 - AG		1350 mm (4'4")
31 x 15.5 - 15 - SK		1364 mm (4'5")
31 x 15.5 - 15 - TURF		1371 mm (4'5.9")
31 x 15.5 - 15 - EM		1380 mm (4'6")

MCL6 / MCL6+		
10/75 - 15.3		1100 mm (3'6")
10 x 16.5		1100 mm (3'6")
31 x 15.5 - 15 - AG		1350 mm (4'4")
15.0/55 - 17		1361 mm (4'5")
31 x 15.5 - 15 - SK		1364 mm (4'5")
31 x 15.5 - 15 - TURF		1371 mm (4'5.9")
31 x 15.5 - 15 - EM		1380 mm (4'6")

MCL8		
10/75 - 15.3		1330 mm (4'4")
10 x 16.5		1330 mm (4'4")
11.5/80 - 15.3		1330 mm (4'4")
31 x 15.5 - 15 - AG		1380 mm (4'6")
31 x 15.5 - 15 - SK		1394 mm (4'6")
31 x 15.5 - 15 - TURF		1401 mm (4'7")
31 x 15.5 - 15 - EM		1410 mm (4'7")
15.0/55 - 17		1435 mm (4'8")
425/55 R17		1472 mm (4'9")

	MCL2	MCL4	MCL4+	MCL6	MCL6+	MCL8
	STD. 0.20 m³ (0.26 yd³)	STD. 0.30 m³ (0.39 yd³)		STD. 0.40 m³ (0.52 yd³)		STD. 0.50 m³ (0.65 yd³)
		Standard boom	Short boom	Standard boom	Short boom	
R	Widest Fixed Point on Machine (ROPS width)	991 mm (3'3")	991 mm (3'3")	991 mm (3'3")	991 mm (3'3")	991 mm (3'3")
S	Ground Clearance	153 mm (0'6")	320 mm (1'0")	320 mm (1'0")	320 mm (1'0")	356 mm (1'2")
T	Clearance Radius - Front / Bucket @ Carry Position	2681 mm (8'9")	3246 mm (10'7")	3246 mm (10'7")	3246 mm (10'7")	3361 mm (11'0")
U	Clearance Radius - Less Bucket	2251 mm (7'4")	2767 mm (9'0")	2767 mm (9'0")	2767 mm (9'0")	2888 mm (9'5")
V	Clearance Radius - Inner	1194 mm (3'11")	1623 mm (5'3")	1623 mm (5'3")	1623 mm (5'3")	1617 mm (5'3")
W	Max Articulation Angle	45°	45°	45°	45°	40°
X	Maximum Rollback Angle - Fully Raised	45°	47°	47°	49°	46°
Y	Dump Angle - Fully Raised	41°	46°	46°	44°	47°
Z	Maximum Rollback Angle @ Ground	47°	50°	50°	49°	50°
AA	Quick-attach Hinge Pin Ground Clearance (Pin Center)	192 mm (0'7")	103 mm (0'4.5")	103 mm (0'4.5")	116 mm (0'4.5")	168 mm (0'6")
BB	Height from ground to axle center	144 mm (0'5")	214 mm (0'8")	214 mm (0'8")	214 mm (0'8")	230 mm (0'9")
CC	Bucket width	1100 mm (3'7")	1520 mm (4'11")	1520 mm (4'11")	1520 mm (4'11")	1520 mm (4'11")



MECALAC FRANCE S.A.S.
2, avenue du Pré de Challes
Parc des Glaisins – CS 40230
Annecy-le-Vieux
FR - 74942 Annecy Cedex
Tel. +33 (0)4 50 64 01 63

WWW.MECALAC.COM

**MECALAC BAUMASCHINEN
GMBH**
Am Friedrichsbrunnen
D-24782 Büdelsdorf
Tel. +49 (0)43 31/3 51-319

**MECALAC CONSTRUCTION
EQUIPMENT UK LTD**
Central Boulevard,
ProLogis Park
Coventry, CV6 4BX, UK
Tél. +44 (0)24 7633 9539

**MECALAC İŞ MAKİNELERİ
SAN VE TIC. LTD. ŞTİ.**
Ege Serbest Bölgesi Nilüfer 1 Sok. No: 34
35410, Gazimir
İzmir - Türkiye
Tel. +90 232 220 11 15

